

# equipment

## STD-75G

Wall, Pedestal or Table Mounted  
Emergency Eye/Facewash Fountain  
with yellow ABS plastic bowl, aerated  
diffusers and flow regulator.

With Stainless Steel bowl **STD-85G**  
Pedestal mounted models **STD-75G/P**  
& **STD-85G/P**

Table/Bench mounted model  
**STD-85G/T** (see page 10)

### OPTIONAL FITTINGS:

- Sign for wall mounting
- Optiflex Hand Shower
- Additional Fine Mesh Filter
- Treadle Foot Control
- Proximity Switch



## STD-45G

"Unbreakable" Wall, Pedestal or Table  
Mounted Emergency Eye/Facewash  
Fountain with integral lid, aerated diffusers,  
flow regulator and self-adhesive sign.

Pedestal version available in Galvanised or  
Stainless Steel.


Pedestal mounted model **STD-45G/P**

Table/Bench mounted model

**STD-45G/T** (see page 10)

### OPTIONAL FITTINGS:

- Sign for wall mounting
- Optiflex Hand Shower
- Additional Fine Mesh Filter
- Treadle Foot Control
- Proximity Switch

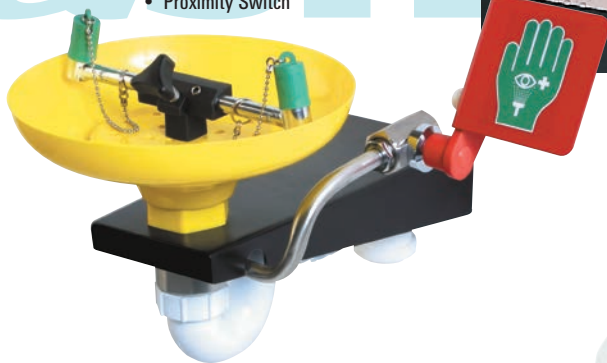

## STD-H-25K/P

Pedestal Mounted Emergency  
Eyebath/Facewash Fountain, trace tape  
heated and pre-insulated. Suitable for  
outdoor use. Incorporating an integral  
lid connected to the water valve which  
automatically operates the unit when  
the lid is lifted. The lid also ensures that  
the bowl remains clean and free from  
contamination at all times and is fitted  
with a mirror and first-aid instructions.

With additional eyebath diffuser on  
flexible hose to treat unconscious or  
disabled personnel.

Available in Galvanised or Stainless  
Steel.

### OPTIONAL FITTINGS:

- Sign for wall mounting
- Treadle Foot Control
- Proximity Switch
- Cubicle



## STD-25K

Wall or Pedestal Mounted Emergency  
Eyebath/Facewash Fountain  
incorporating an integral lid connected  
to the water valve to automatically  
operate the unit when the lid is lifted.  
The lid also ensures that the bowl  
remains clean and free from  
contamination at all times and is fitted  
with a mirror with first-aid instructions.  
With additional eyebath diffuser on  
flexible hose to treat unconscious or  
disabled personnel.

Available in Galvanised or Stainless  
Steel.

Pedestal mounted model **STD-25K/P**

### OPTIONAL FITTINGS:

- Sign for wall mounting
- Treadle Foot Control
- Proximity Switch

	Stainless Steel	Depth mm	Width mm	Height mm	Weight kg	Inlet Size (" inches) BSP	Min. Pressure kg/cm <sup>2</sup> (bar g)	Water Flow l/min
<b>Eyebaths</b>								
STD-38G	-	220	220	725	5.5	-	8	8
STD-28G	-	180	180	650	3.5	-	7	4.5
Cabinet for 28G	-	240	330	880	5.5	-	-	-
STD-35G	-	115	340	175	2	15mm or 1/2"	1.5	4.5
STD-45G	-	265	340	205	3	15mm or 1/2"	2	20
STD-45G/P	STD-45GS/P	365	340	1175	10	1 1/4"	2	20
STD-25K	STD-25KS	565	475	390	13	1/2"	2.2	30
STD-25K/P	STD-25KS/P	580	475	1130	20	1 1/4"	2.2	30
STD-H-25K/P	STD-H-25KS/P	720	475	1130	26	1 1/4"	2.2	30
STD-75G	STD-85G	400	410	315	3.5	15mm or 1/2"	2	12
STD-75G/P	STD-75GS/P	510	285	1175	8	1 1/4"	2	12
STD-85G/P	STD-85GS/P	510	285	1175	8	1 1/4"	2	12
OPTIFLEX 100	-	70	70	230	1	1/2"	1.5	8