

EXP-18G/75G

Unheated Emergency Safety Shower with Eye/Facewash Fountain. With high level water inlet and Eye/Facewash drained to floor level. Available in Galvanised or Stainless Steel.

Note: Eye/Facewash orientation can be varied to suit clients' requirements. Available with Stainless Steel Eye/Facewash bowl **EXP-18G/85G**.

OPTIONAL FITTINGS:

- Signs and Brackets
- Plastic or Stainless Steel Shower Rose
- Treadle for Eye/Facewash
- Light
- Proximity Switches
- Cubicle

EXP-20G/45G

Unheated Emergency Safety Shower with additional body spray and Eye/Facewash Fountain. With low level water inlet. Available in Galvanised or Stainless Steel.

Note: Also available with Eye/Facewash drain piped to floor level and high level water inlet. Model **EXP-20G/45G-T**.

Note: Eye/Facewash orientation can be varied to suit clients' requirements.

OPTIONAL FITTINGS:

- Signs and Brackets
- Plastic or Stainless Steel Shower Rose
- Optiflex Hand Shower
- Foot Panel or Treadle for Shower
- Treadle for Eye/Facewash
- Light
- Proximity Switches
- Protective Frame

EXP-18G/45G-T

As **EXP-18G/45G** but with Eye/Facewash drain piped to floor level and high level water inlet.

Available in Galvanised or Stainless Steel.

OPTIONAL FITTINGS:

(as **EXP-18G/45G**)

STD-40K

Mobile Emergency Safety Shower with a capacity of approx 114 litres (25 gallons) giving a constant flow of water for about 1½ minutes.

Mobile Emergency Safety Showers are for use when fixed units are not available or are temporarily out of commission.

OPTIONAL FITTINGS:

- Optiflex Hand Shower
- Eye/Facewash **STD-45G**
- A-Frame for towing

PRODUCT INFO


- Unheated models for indoor use
- Free standing, wall or ceiling mounted
- Easy maintenance

TECHNICAL DETAILS

- Separate modules
- Compact packaging
- Cost effective carriage

CHOICES

- Low-level or high-level water inlet
- Body spray
- Eye/Facewash units
- Eye/Facewash drain piped to floor level
- Available with tubulars either of galvanised carbon steel protected by green Hammerite enamel, or alternatively of semi-polished Stainless Steel
- Mobile Model

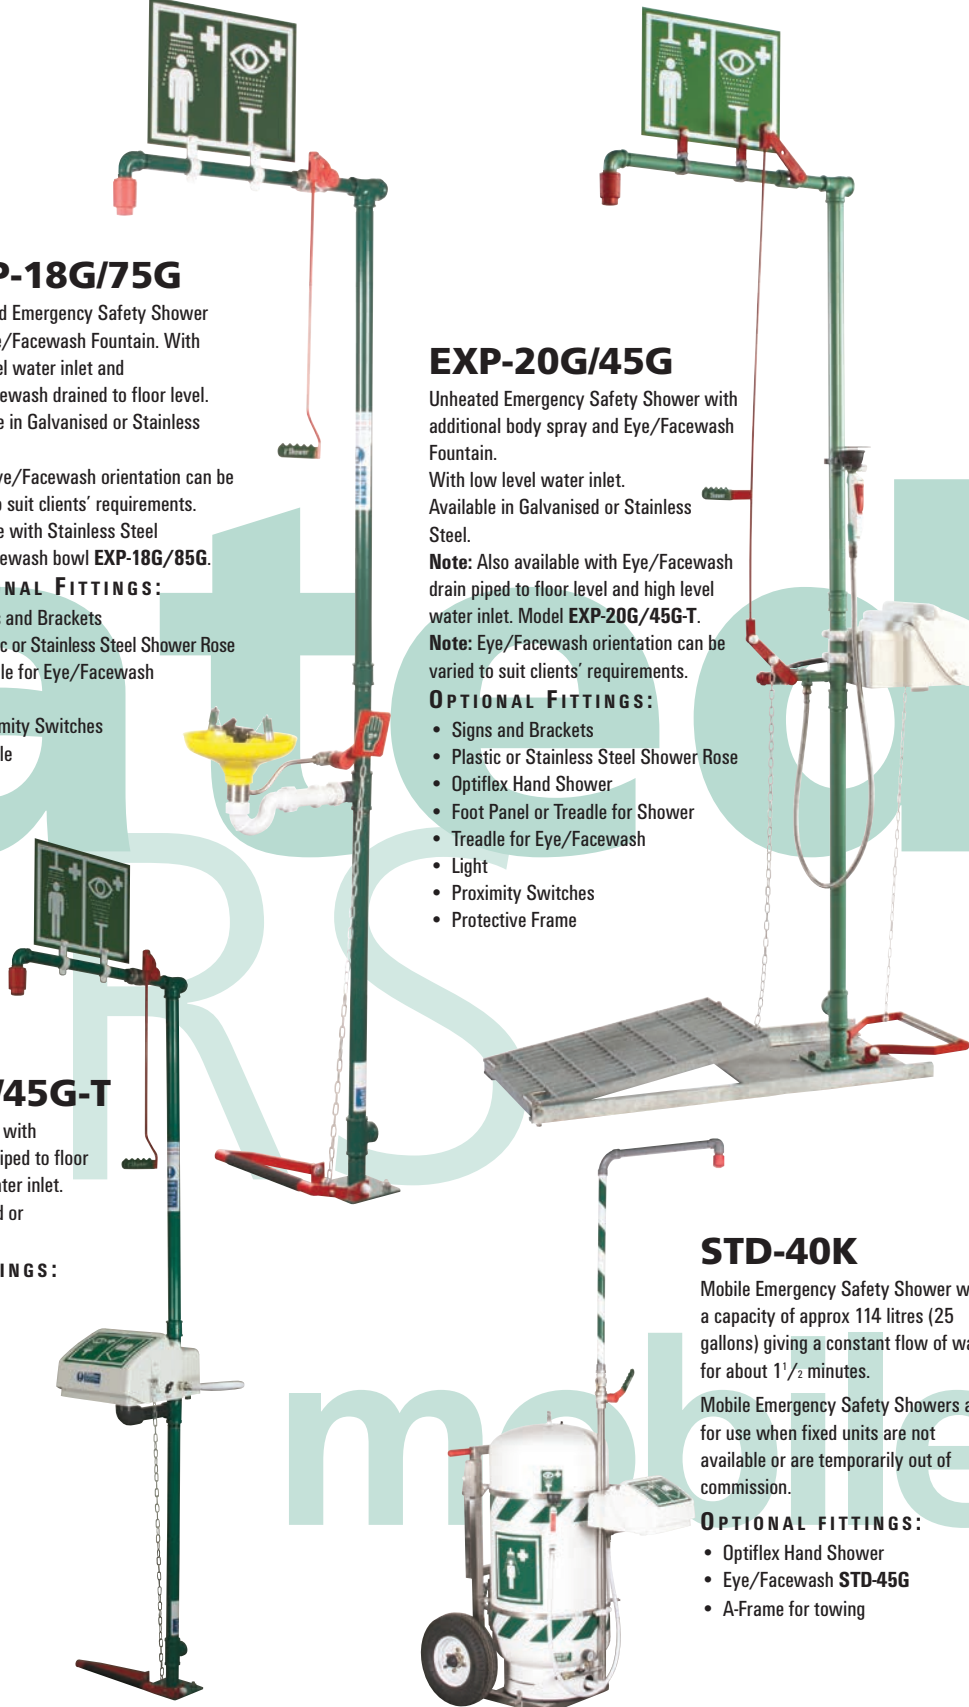

Galvanised	Stainless Steel	Depth mm	Width mm	Height mm	Weight kg	Inlet Size (" inches) BSP	Min. Pressure kg/cm ² (bar g)	Water Flow l/min
Unheated Safety Showers								
EXP-18G	EXP-18GS	750	150	2300	15	1 1/4"	1.5	75
EXP-18G/45G	EXP-18GS/45G	750	340	2300	18	1 1/4"	2	75
EXP-18G/45G-T	EXP-18GS/45G-T	750	340	2330	18	1 1/4"	2	75
EXP-20G	EXP-20GS	1050	460	2300	16	1 1/4"	1.8	115
EXP-20G/45G	EXP-20GS/45G	1180	460	2300	19	1 1/4"	2.2	115
EXP-20G/45G-T	EXP-20GS/45G-T	1180	460	2330	19	1 1/4"	2.2	115
EXP-23G/V	EXP-23GS/V	150	150	370	3.5	1"	1.5	75
EXP-23G/H	EXP-23GS/H	705	150	185	4.5	1"	1.5	75
EXP-23G	EXP-23GS	635	100	130	3	1"	1.5	75
EXP-18G/75G	EXP-18GS/75G	750	285	2330	16	1 1/4"	2	75
EXP-18G/85G	EXP-18GS/85G	750	285	2330	16	1 1/4"	2	75
STD-40K (Stowed dims.)	-	1170	780	1430	105	1/2" Coupling	-	-
STD-40K (Erected dims.)	-	1480	780	2250	220	1/2" Coupling	2	75

STD-40K is a mobile unit. All other units are free standing except EXP-23G/V which is ceiling mounted, and EXP-23G/H which is wall mounted.