



## PRODUCT INFO

- GRP outer casing and lid
- Fully insulated
- Pictogram Signs included

## CHOICES



- Green GRP outer casing and lid
- Galvanised or Stainless Steel Frames
- Three sizes available:  
350 litre version (-14K/350)  
750 litre version (-14K/750)  
1200 litre version (-14K/1200)

## OPTIONAL FITTINGS

- Non-Flameproof Light
- Zone 1 & 2 Light
- Eye/Facewash Fountain
- Hand Held Eyebath Unit
- Panel Foot Control
- GRP Panelling on legs
- Level Switch
- Proximity Switches
- Syphon Dump Valve
- Visual Level Indicator
- Drain Sump
- Mains Fed Shower System
- Strip Screens
- Shower Doors
- Shower Test Handle
- Audible & Visual Alarms
- Sun Shields



## TECHNICAL DATA

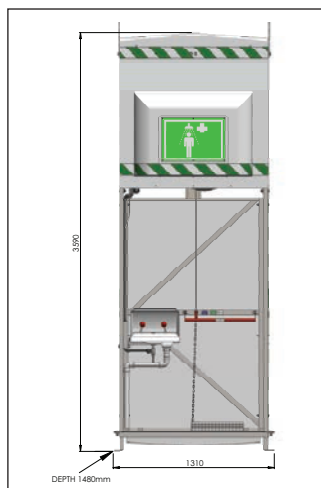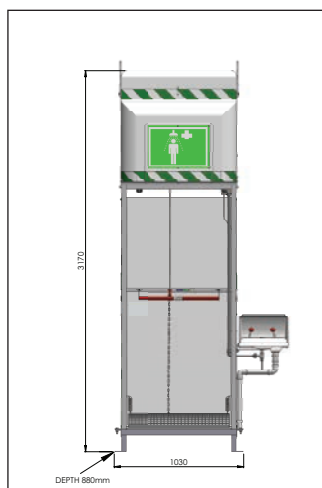

**EXP-MH-14K/350**

**EXP-MH-14K/1200**

(EXP-MH-14K/750 as above but 3315mm high)

# tank showers

A range of heavy duty Emergency Tank Showers, for use when warm water is required, or a constant supply of water cannot be guaranteed.

These units are essential where there is a problem with

insufficient water pressure or inadequate flow rate.

The outdoor types are heated and pre-insulated to prevent freezing during conditions of frost, whereas the indoor or tropical versions are insulated but without heating, to

ensure a steady temperature is maintained.

Tropical models can be fitted with optional Sun Shields to give extra protection from solar radiation.

Galvanised	Stainless Steel	Depth mm	Width mm	Height mm	Weight kg	Inlet Size (" inches) BSP	Min. Pressure kg/cm <sup>2</sup> (bar g)	Water Flow l/min
<b>Lab Range</b>								
LAB-23G/H	LAB-23GS/H	770	260	240	3.5	1"	1.5	75
LAB-23G/V	LAB-23GS/V	260	300	275	2.5	1"	1.5	75
LAB-33G/34G	LAB-33GS/34G	770	260	1400	9	1"	2	75
-	LAB-85GS/T	275	400	160	2.5	3/4"	2	12
STD-45G/T	-	265	340	300	3.5	15mm or 1/2"	2	20
<b>Tank Showers</b>								
EXP-MH-14K/350	EXP-MH-14KS/350	880	1035	3115	150	3/4"	0.5	75
EXP-MH-14K/750	EXP-MH-14KS/750	1480	1320	3315	270	3/4"	0.5	75
EXP-MH-14K/1200	EXP-MH-14KS/1200	1480	1320	3525	320	3/4"	0.5	75
EXP-J-14K/350	EXP-J-14KS/350	880	1035	3115	150	3/4"	0.5	75
EXP-J-14K/750	EXP-J-14KS/750	1480	1320	3315	270	3/4"	0.5	75
EXP-J-14K/1200	EXP-J-14KS/1200	1480	1320	3525	320	3/4"	0.5	75

Indoor or Tropical models are denoted by the prefix -J- prior to the model number ie. EXP-J-14K/350